





INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁶ : H01M 8/24, 8/02, 10/04, 6/46, 2/02, C25B 9/02, B01D 63/08</p>	<p>A1</p>	<p>(11) International Publication Number: WO 97/24778 (43) International Publication Date: 10 July 1997 (10.07.97)</p>
<p>(21) International Application Number: PCT/GB96/03162 (22) International Filing Date: 19 December 1996 (19.12.96) (30) Priority Data: 9526577.3 28 December 1995 (28.12.95) GB (71) Applicant (for all designated States except US): NATIONAL POWER PLC [GB/GB]; Windmill Hill Business Park, Whitehill Way, Swindon, Wiltshire SN5 6PB (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): CLARK, Duncan, Guy [GB/GB]; Westham House, Marlston Road, Hermitage, Berkshire RG18 9SU (GB). JOSEPH, Stephen, Hampden [GB/GB]; 12 Grange Crescent Road, Sheffield S11 8FX (GB). MALE, Stewart, Ernest [GB/GB]; 68 Farm Close, East Grinstead, West Sussex RH19 3QG (GB). (74) Agent: BOULT WADE TENNANT; 27 Fumival Street, London EC4A 1PQ (GB).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>

(54) Title: METHOD FOR THE FABRICATION OF ELECTROCHEMICAL CELLS

(57) Abstract

A method of fabricating an electrochemical or galvanic cell comprising a plurality of electrochemical components, which electrochemical components are joined together in a stack, which method comprises: i) providing a first component (1) formed from a deformable polymeric material with at least one substantially continuous groove (2) comprising a female opening having a width of w and a depth of h ; ii) providing a second component (3) with at least one substantially continuous upstand (4) having a width of $> w$ and a height of $< h$; iii) pressing the first and second components together in order to provide an integral seal between the upstand on the second component and the opening in the first component, with the seal between the parts being provided by sealing engagement of the sides of the upstand with the sides of the openings; and iv) joining a plurality of first and second components together to form a stack.

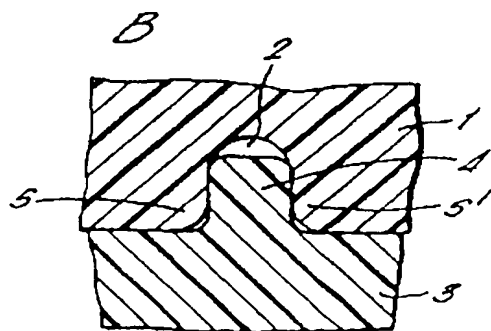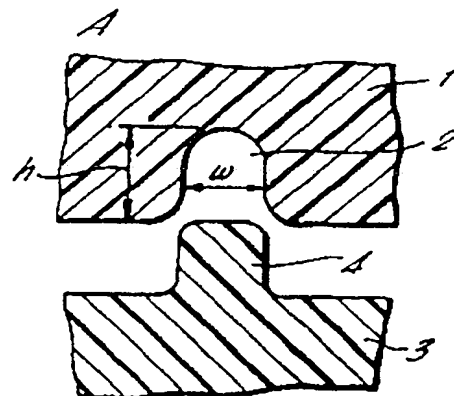

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TU	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

METHOD FOR THE FABRICATION OF ELECTROCHEMICAL CELLS

The present invention relates to a method for the fabrication of electrochemical cells and, in particular, to a method for the fabrication of industrial electrolytic or galvanic cells which comprise a plurality of components joined together in a stack.

Industrial electrolytic or galvanic cells, such as secondary batteries, fuel cells and electrolyzers, typically consist of modules which each comprise a number of stacked, layered components which are clamped together in a stack. For example, in a secondary battery of the redox flow type the components typically consist of electrically insulating flow-frames, each containing an electrode, with a plurality of such flow-frames being sandwiched together with other components such as membranes and meshes. Secondary batteries of this type are well known to a person skilled in the art.

In the assembly of the modules from their component parts the most important considerations are:

- i) in order to ensure that the fluids which are inside the stack are isolated from each other and contained successfully with minimal leakage to the outside, it is necessary for satisfactory seals to be provided between the individual layers of the stack and between the individual compartments within the stack, for example, by sealing a frame around the perimeter of each electrode;

- ii) each component layer of the stack should be accurately positioned in relation to the adjacent components; and

iii) the sandwiched arrangement of electrodes, membranes and meshes should remain intact and undisturbed as the rest of the stack is formed and the unit sealed. Some membranes
5 may have a tendency to tear, crease, fold or puncture and/or may be highly sensitive to the partial pressure of water.

Conventionally, fluid seals have been achieved, for example, by employing an elastomeric seal
10 arrangement between each flow frame, such as an O-ring or flat gasket. Conventional locating and holding devices may be used to position individual components with respect to their neighbours and then to fix them in place to form a sub-module. However, when the
15 stack consists of large numbers of components, a reliable assembly of the stack with a plurality of O-rings is still difficult to achieve and is labour intensive. Elastomeric materials which are chemically resistant to aggressive electrolyte chemicals are
20 relatively costly and can make up a significant proportion of the total cost of such an assembly. Furthermore, the requirement for O-ring grooves may conflict with the easy and reliable fulfilment of the other functions of the frame, such as the flow
25 distribution of liquid electrolytes, especially with stacks containing thin frames, for example when the thickness of the frame approaches <2.5 times the thickness of electrolyte feed channel.

It has also been proposed to create fluid seals
30 with the avoidance of the cumbersome and costly assembly of O-rings by welding the layers together, for example using friction welding for frame to frame seals, and/or laser welding for electrode to frame seals. Disadvantages of this method include the
35 possible disruption of carefully positioned and

conditioned membranes by movement and/or heat during
frame-to-frame sealing, the need to have compatible
materials which can be welded together successfully,
the inability to disassemble and the method of
5 guaranteeing the reliability of the weld.

A further type of sealing arrangement has been
proposed in which a sealing mechanism is incorporated
into the form of the flow frame and in which a
flexible blade locates with a special channel
10 specifically for the purpose of completing the seal.
A sealing arrangement of this type is disclosed in US-
A-4640876. The flexible blade which completes the
seal is, however, difficult to manufacture and due to
flexing would be susceptible to environmental and
15 mechanical degradation.

FR-A-2292345 describes a tongue and groove
arrangement for joining together the frame components
of a electrical cell. The tongue on one frame is
fitted into the corresponding groove on an adjacent
20 frame and the frames fixed together using adhesives,
solvents or ultrasonic welding.

FR-A-2700639 describes a seal formed by pinching
a flat metallic sheet between a tongue and a groove
formed opposite one another on adjacent frames, the
25 sheet being pinched under the action of the means for
compressing the stack of elements. The seal between
the adjacent frames is maintained by the compression
of the flat metallic sheet.

We have now developed an improved method for the
30 fabrication of an electrochemical cell comprising a
plurality of electrochemical components joined
together in a stack in which method the tasks of
locating, sealing and securing the stack components is
achieved by a single integral sealing arrangement.

35 Accordingly, the present invention provides a

method of fabricating an electrochemical or galvanic cell comprising a plurality of electrochemical components, which electrochemical components are joined together in a stack, which method comprises:-

- 5 i) providing a first component formed from a deformable polymeric material with at least one substantially continuous groove comprising a female opening having a width of w and a depth of h ;
- 10 ii) providing a second component with at least one substantially continuous upstand having a width of $>w$ and a height of $<h$;
- iii) pressing the first and second components together in order to provide an integral
15 seal between the upstand on the second component and the opening in the first component, with the seal between the parts being provided by sealing engagement of the sides of the upstand with the sides of the
20 opening; and
- iv) joining a plurality of first and second components together to form a stack.

In carrying out the method of the present invention the first component is formed from a
25 deformable polymeric material, in order that when the first and second components are brought together an appropriate distribution of deformations will be obtained in order that the required seal can be obtained between the first and second components.
30 Suitable polymeric materials from which the first component may be made include those capable of sustaining continued tensile stress and providing local compressive yield without catastrophic failure, particularly semi-crystalline polymers such as the
35 many grades of polyethylene, polypropylene and their

blends of copolymers, acetal, nylons, polyethylene terephthalate, polyvinylidene fluoride, polyvinylchloride, polytetrafluoroethylene, fluorinated ethylene-propylene copolymer, polyfluoroamide, chlorinated polyoxymethylene plus many others. In order to provide the first component of the desired configuration these polymeric materials may be machined, injection moulded, compression moulded or otherwise formed.

The material from which the second component is formed may be a deformable polymeric material, for example, it may be formed from the same polymeric material as the first component, although the second component does not have to be formed from a deformable polymeric material. Additional materials which can therefore be used in the construction of the second component are materials less resistant to sustained tension, such as heavily filled grades of the materials from which the first component may be made, and noncrystalline polymers such as polystyrene, polymethylmethacrylate and polycarbonate. Furthermore, it is also contemplated that the second component may be a metal electrode or a carbon, titania or ceramic component.

In a preferred embodiment of the present invention the substantially continuous opening provided in the first component has sides which are perpendicular or substantially perpendicular to the plane of the first component whilst the substantially continuous upstand provided on the second component has sides which are perpendicular or substantially perpendicular to the plane of the second component. It will be understood that the sealing system of the present invention will operate in any orientation, depending upon the orientation of the components which

are to be joined together. Although perpendicular or substantially perpendicular seals are preferred, the seal may be angled at up to about 45°, if desired.

5 It will be understood that whilst the seal of the present invention preferably has a profile of a substantially constant cross section, the cross-section may vary along the length of the seal, if desired.

10 It will be understood that a plurality of components of an electrochemical galvanic cell are joined together in this manner. Accordingly, when the first and second components are formed from polymeric materials the second component will generally not only be provided with at least one substantially continuous
15 upstand protruding from a first surface thereof, but it will generally also be provided with at least one substantially continuous female opening in the second surface thereof in order to enable it to be joined to a further component. It will be appreciated that any
20 component which is provided with a female opening, even if it is also provided with an upstand, must be made from a deformable material. When the second component is made from a non-deformable material, such as a metal, a different arrangement is required in
25 order to enable a plurality of components to be joined together. The second component will then generally be provided with upstands on both first and second surfaces, the upstand on the second surface enabling it to be joined to a further component made from a
30 deformable material having a complementary groove formed therein.

On bringing the first and second components together, the interference between the sides of the opening and the sides of the upstand is such as to
35 develop a degree of stress at their contact, typically

10 to 100 MN/m², sufficient to deform them into close conformity with one another. The shape of the upstand and the opening, in conjunction with the close conformity already obtained, is such as to sustain
5 this stress at a level, typically 1 to 10 MN/m², sufficient to maintain the seal against the pressures used in electrochemical cells, typical ranging from 10 to 1000 KN/m². The degree of interference and the exact shapes of the upstand and the opening are
10 determined from the mechanical properties of the materials from which they are made, the tolerances and surface finish with which they may be manufactured, and the facility of assembly and disassembly desired. It will be understood that use may also be made of end
15 plates and tie bars, as necessary to maintain the integrity of the cell if it is internally pressurized.

The deformation induced by the misfit should be sufficient to reform the surfaces in contact with respect to irregularities. Generally, the degree of
20 misfit between the width of the opening w of the first component and the width of the upstand of the second component is such as to generate a strain deformation of 0.1 to 20%, more preferably 3 to 5% in the material at the sealing surfaces.

25 Whilst the width of the upstand on the second component is greater than the width w of the female opening in the first component, so as to bring them forcibly into contact along their sides the reverse situation exists, in relation to the other adjacent
30 parts of these components. It is important that these other adjacent parts are relieved so as to confine the forcible contact between the components to their sides. The depth of the root of the opening is thus greater than the height of the upstand, and the width
35 of the mouth of the opening is greater than the width

of the base of the upstand. The widening of the mouth of the opening and the relieving radius of the upstand also serves to preserve the sealing surfaces from damage during assembly, and facilitate the assembly process. The seal of the present invention thus is provided by the engagement of the sides of the upstand with the sides of the opening and does not require clamping of the stack either to form, or to maintain the seal. The forces which produce the seal of the present invention are thus perpendicular to the compressive forces in the stack of electrochemical components.

The shape of the root of the opening must, however, complement closely the shape of the upstand so as to retain the shape of the opening and sustain the forces arising from the contact between the two components. Similarly, the bulk of the material in the first component around the opening must be sufficient for this purpose, typically providing solid material around the opening to a distance of not less than the depth of the opening.

It will be understood that the first component may comprise a plurality of openings and the second component may comprise the same number of complementary upstands such that the two components are sealed and joined together at more than one location. Alternatively, the first component may be sealed to more than one second component so that the number of openings in the first component will equate to the number of upstands in the second components.

A plurality of electrochemical components may be joined together to form a sub-modular stack, for example a sub-modular stack containing 10 or more whole cells. In such an arrangement the membranes and other cell components are not unduly stressed. Such

sub-modular stacks are relatively robust when formed and can be handled as a unit. Several sub-modular stacks can then be joined together using known techniques, or using the method of the invention in order to provide the desired final module. For example 10 sub-modular stacks could be joined together in order to provide a final module comprising up to 100 whole cells, or even more sub-modular stacks could be joined together in order to provide a final module comprising up to several 100 whole cells.

The method of the present invention enables an electrochemical or galvanic cell to be fabricated in a relatively easy manner to the required tolerances with the minimum of equipment, process steps and cost. Additionally and importantly, since the seal between the first and second components is generated by mechanical means it can be used in order to join components together which are made from different polymeric materials, including those which are incompatible to the welding techniques which have previously been used in the art. A further advantage of the method of the invention is that the components may be disassembled in order to trace and repair faults which need not necessarily be related to the sealing mechanisms but may be, for example, faults in the membrane or electrode.

In particular, the method of the present invention may be used to join the frame component of an electrochemical cell to the electrodes, even when the materials from which the frame and the electrodes are made are unsuitable to be welded together.

The present invention will be further described with reference to the accompanying drawings in which:-

Figure 1A shows a diagrammatic section through sections of a first component and a second component

before being pressed together;

Figure 1B shows a diagrammatic section through the first and second components of Figure 1A when pressed together;

5 Figure 2 shows a diagrammatic section through an electrochemical cell formed by the method of the invention; and

10 Figure 3A and 3B show diagrammatic sections through sections of an alternative first component and an alternative complementary second component before being pressed together.

Referring to Figures 1A and 1B of the drawings, a first component 1 formed from a deformable thermoplastics material such as high density
15 polyethylene has a groove 2 of width w and height h formed therein. The second component 3 has an upstand 4 formed therein. It will be seen from the relative dimensions of the upstand 4 and the opening 2 that the upstand has a width greater than w and a height less
20 than h .

The components 1 and 3 are press fitted together with the upstand 4 being pressed into the opening 2, the opening deforming sufficiently to receive the upstand.

25 A seal between the two parts is provided between the vertical sides of the opening 2 and the upstand 4 as shown at S and S' on Figure 1B of the drawings.

Referring to Figure 2, a redox flow battery 5 is shown in schematic cross-section. The battery
30 comprises a stack of twelve bipolar electrodes 6 which are provided at either end of the stack with electrical connections 7 and 8. The bipolar electrodes are separated one from another by cation exchange membranes 9 and are each joined to an
35 insulating flow frame 10. Each insulating flow frame

10 is joined to the next frame in the stack by a seal between the parts being formed as described with reference to Figures 1A and 1B. The upstands on the flow frames 10, which extend continuously or
5 substantially continuously around the frames, are shown at 4. The upstands 4 are pressed into corresponding continuous or substantially continuous grooves formed in the adjacent flow frame. The electrodes 6 are sealed to the insulating flow frames 10 by suitable
10 means, not specifically shown.

Two electrolytes A and B fill the cavities formed between the alternate sides of the bipolar electrode 6 and the membranes 9. The flow distribution means for the electrolytes A and B are not shown.

15 The redox flow battery has end plates 11 and 12 which are profiled in such a manner that they can be sealed to the top flow frame shown in the stack and the bottom flow frame shown in the stack, respectively.

20 It will be understood that tie bars and end plates (not shown) may also be required to maintain the integrity of the cell if it is internally pressurized.

Referring to Figures 3A and 3B, a first component
25 20 (shown at 10X magnification in Figure 3A) is formed from a deformable thermoplastic material, such as high density polyethylene. This component has an opening 21 which has a height corresponding to h. The walls of the opening have a minor inward slope beginning at
30 point X on the wall. At the point X where the inner wall begins to slope, the opening has a width w of 2.614mm and a width w' where the slope of the inner wall terminates of 2.358mm.

A second component 23 (shown at 10X magnification
35 in Figure 3B) is formed from polyethylene. The second

component has a upstand 24 formed therein. The upstand has a height H which is less than the height h of the opening 21 in Figure 3A. At its widest point the upstand has a width W of 2.512mm which is greater
5 than the width w' of the opening 21.

The components 20 and 23 are press fitted together with the upstand 24 being pressed into the opening 21 which deforms sufficiently to accommodate it. With the design as illustrated in Figures 3A and
10 3B, the sealing area between components 20 and 23 is as small as practicable, which facilitates the assembly of the components and also the maintenance of the assembly as the forces generated are smaller than those encountered with designs with a larger sealing
15 area.

CLAIMS:

1. A method of fabricating an electrochemical or galvanic cell comprising a plurality of electrochemical components, which electrochemical components are joined together in a stack, which method comprises:-

- i) providing a first component formed from a deformable polymeric material with at least one substantially continuous groove comprising a female opening having a width of w and a depth of h ;
- ii) providing a second component with at least one substantially continuous upstand having a width of $>w$ and a height of $<h$;
- iii) pressing the first and second components together in order to provide an integral seal between the upstand on the second component and the opening in the first component, with the seal between the parts being provided by sealing engagement of the sides of the upstand with the sides of the opening; and
- iv) joining a plurality of first and second components together to form a stack.

2. A method as claimed in claim 1 wherein the degree of misfit between the width of the opening w of the groove of the first component and the width of the upstand of the second component is such as to generate a strain deformation of from 0.1 to 20%.

3. A method as claimed in claim 2 wherein the strain deformation is from 3 to 5%.

4. A method as claimed in any one of the preceding claims wherein the first component comprises a plurality of substantially continuous grooves and the second component comprises the same number of
5 complementarily positioned substantially continuous upstands.

5. A method as claimed in any one of the preceding claims wherein the first component is made
10 from polyethylene, polypropylene, copolymers of polyethylene and polypropylene, acetal, nylons, polyethylene terephthalate, polyvinylidene fluoride, polyvinyl-chloride, polytetrafluoroethylene, fluorinated ethylene-propylene copolymer,
15 polyfluoroamide, or chlorinated polyoxymethylene.

6. A method as claimed in any one of the preceding claims wherein the second component is made from filled grades of the materials from which the
20 first component may be made, or polystyrene, polymethyl-methacrylate or polycarbonate.

7. A method as claimed in any one of the preceding claims wherein a plurality of electro-
25 chemical components are joined together to form a sub-modular stack.

8. A method as claimed in claim 7 wherein a plurality of sub-modular stacks are joined together in
30 order to form a module.

9. A method as claimed in claim 8 wherein the module comprises up to several 100 whole cells.

35 10. A secondary battery, fuel cell or

electrolyser which has been fabricated by a method as claimed in any one of the preceding claims.

1/3

FIG. 1A.



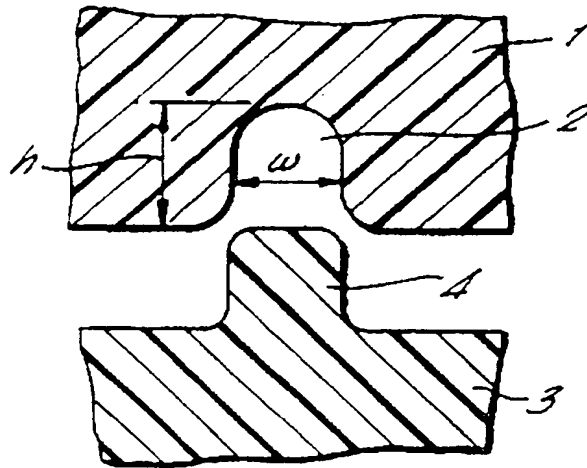


FIG. 1B.

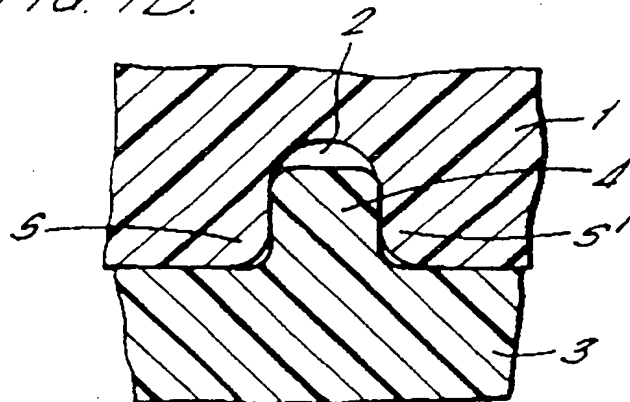

2/3

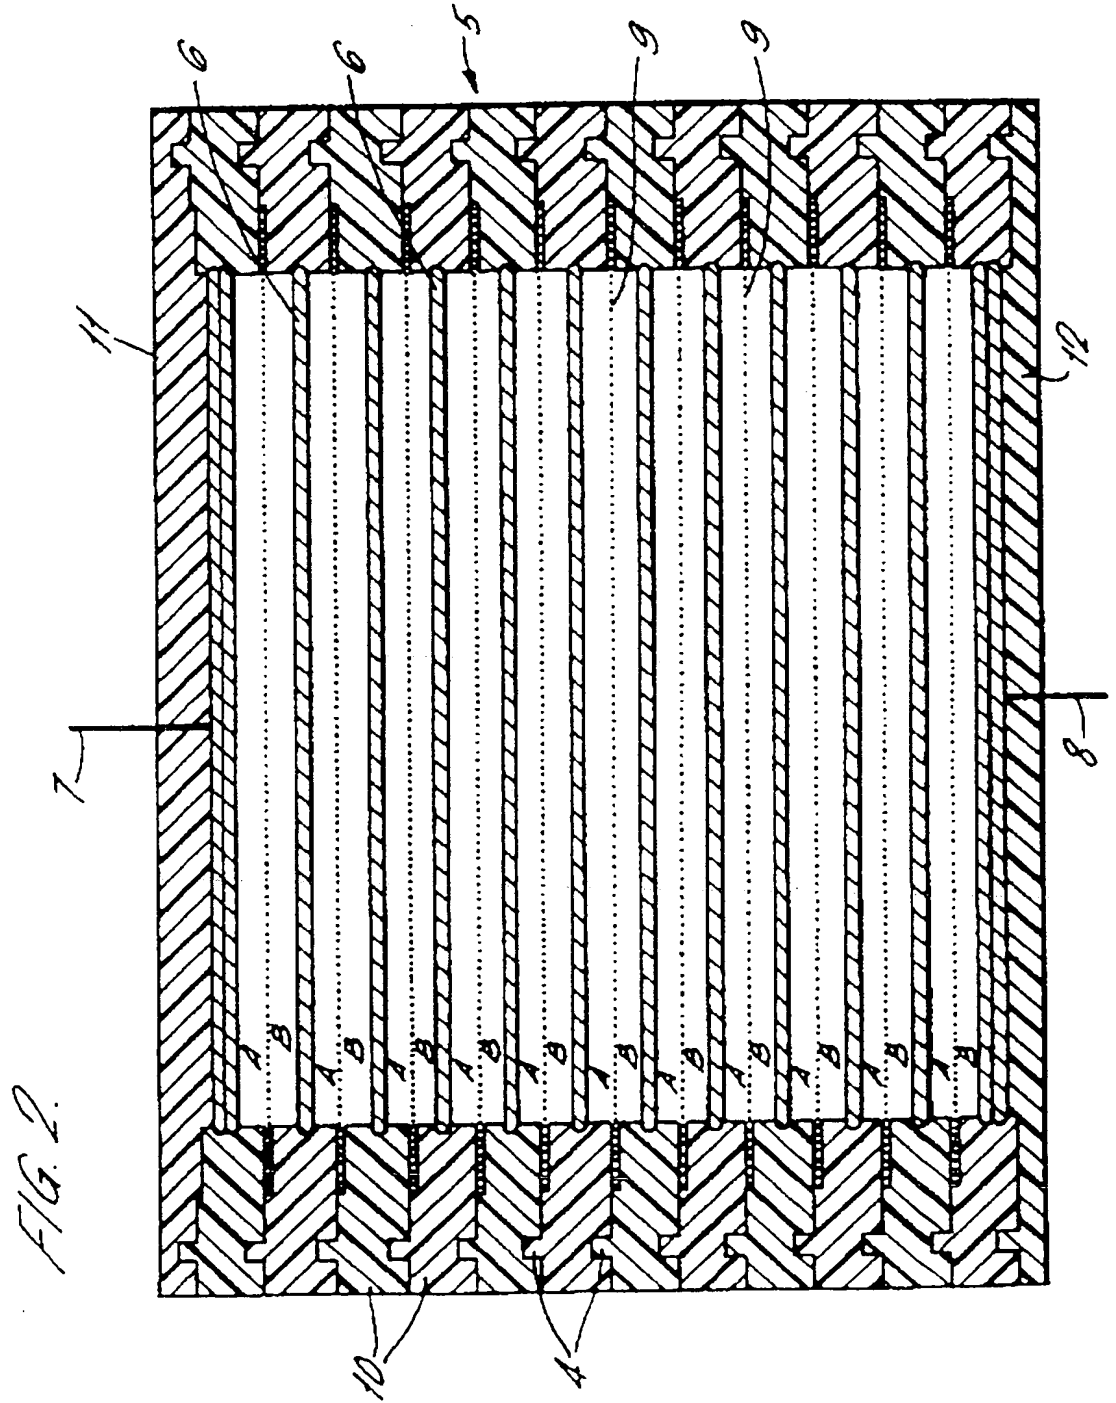

3/3

FIG. 3A.


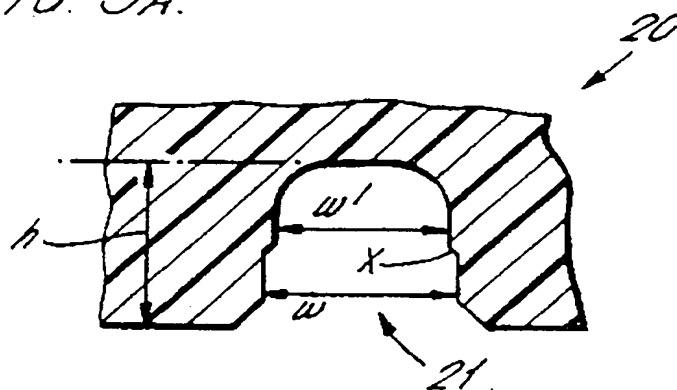


FIG. 3B.

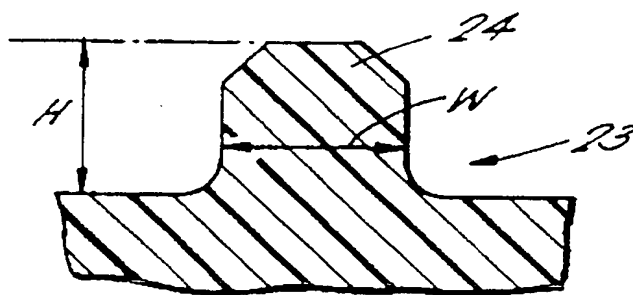

INTERNATIONAL SEARCH REPORT

International Application No
GB 96/03162

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 H01M8/24 H01M8/02 H01M10/04 H01M6/46 H01M2/02 C25B9/02 B01D63/08		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 6 H01M C25B B01D		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR 2 700 639 A (BERTIN & CIE ;BERTIN & CIE) 22 July 1994 cited in the application see page 5, line 27 - page 6, line 9; claims 3,6,10; figure 4 see page 7, line 1 - line 4 see page 7, line 12 - line 29 see page 6, line 19 - line 30 ---	1,4,7,10
A	PATENT ABSTRACTS OF JAPAN vol. 013, no. 068 (E-716), 16 February 1989 & JP 63 252368 A (TOYOTA MOTOR CORP), 19 October 1988, see abstract --- <div style="text-align: center;">-/-</div>	1,7,10
<div style="display: flex; justify-content: space-between;"> <input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex. </div>		
<div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search	Date of mailing of the international search report	
6 February 1997	21.02.97	
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax (+ 31-70) 340-3016	Authorized officer D'hondt, J	

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/GB 96/03162

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 320 092 A (LAWRENCE J. ULINE) 16 May 1967 see column 3, line 66 - column 4, line 4; claims 1,5; figure 2 ---	1,4,6,10
A	DE 18 05 819 A (ENERGY CONVERSION LTD) 31 July 1969 see page 5, paragraph 2; figures 1-5 see page 6, paragraph 3 ---	1,4,6-8, 10
A	EP 0 402 909 A (DOW CHEMICAL CO) 19 December 1990 see column 5, line 54 - column 6, line 39; claims 1,4,9; figures 2,5 see column 7, line 52 - column 8, line 23 see column 11, line 1 - line 5 ---	1,4-7,10
A	PATENT ABSTRACTS OF JAPAN vol. 007, no. 170 (E-189), 27 July 1983 & JP 58 078372 A (HITACHI SEISAKUSHO KK), 11 May 1983, see abstract ---	1,10
A	US 1 712 897 A (WILLIAM MORRISON) 14 May 1929 see page 2, line 111 - line 119; figure 15 see page 2, line 3 - line 6 ---	1,7,8,10
A	FR 2 410 058 A (ELECTRICITE DE FRANCE) 22 June 1979 see page 4, paragraph 1; figure 1 see page 5, paragraph 2 ---	1,4,5,10
A	GB 1 145 751 A (JOHN THOMSON ANDERSON ET AL) 19 March 1969 see page 2, line 59 - line 74 see page 3, line 88 - line 105; figures 3,4 see page 1, line 72 - line 75 ---	1,10
A	US 4 379 814 A (HSUE C. TSIEN ET AL) 12 April 1983 cited in the application see column 5, line 43 - line 63; figure 3 ---	1,10
A	FR 2 292 345 A (DUNLOP AUSTRALIA LTD) 18 June 1976 see page 8, paragraph 2; figure 6 ---	1,10
A	DE 43 42 485 C (GORE W L & ASS GMBH) 30 March 1995 see column 10, line 33 - line 58; figures 6,7 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No
P B 96/03162

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR-A-2700639	22-07-94	WO-A- 9417563	04-08-94
US-A-3320092	16-05-67	BE-A- 641787	16-04-64
		DE-B- 1496290	15-01-70
		FR-A- 1378579	26-02-65
		GB-A- 1019319	
		NL-A- 302663	
DE-A-1805819	31-07-69	BE-A- 723247	01-04-69
		CH-A- 487511	15-03-70
		FR-A- 1591668	04-05-70
		GB-A- 1223127	24-02-71
		NL-A- 6815576	06-05-69
		US-A- 3565693	23-02-71
EP-A-0402909	19-12-90	CA-A- 2018857	14-12-90
		DE-T- 69002545	25-11-93
		JP-A- 3044489	26-02-91
US-A-1712897	14-05-29	NONE	
FR-A-2410058	22-06-79	NONE	
GB-A-1145751		NONE	
US-A-4379814	12-04-83	AU-B- 595456	29-03-90
		AU-A- 1774288	06-10-88
		AU-B- 578975	10-11-88
		AU-A- 4741985	20-02-86
		AU-B- 551084	17-04-86
		AU-A- 8125482	09-12-82
		CA-A- 1174729	18-09-84
		CA-C- 1184972	02-04-85
		CA-C- 1183204	26-02-85
		CA-C- 1183203	26-02-85
		DE-A- 3280369	28-11-91
		EP-A- 0066938	15-12-82
		EP-A- 0203656	03-12-86
		EP-A- 0203657	03-12-86
		JP-A- 4357676	10-12-92

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

GB 96/03162

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR-A-2292345	18-06-76	AU-A- 8691075	02-06-77
		BE-A- 863449	16-05-78
		CA-A- 1046138	09-01-79
		DE-A- 2552471	26-05-76
		GB-A- 1515688	28-06-78
		JP-C- 1380457	28-05-87
		JP-A- 51092043	12-08-76
		JP-B- 61044382	02-10-86
		US-A- 4022951	10-05-77

DE-C-4342485	30-03-95	EP-A- 0658372	21-06-95
		JP-A- 7194933	01-08-95

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.